

# CT-5363

## Wireless ADSL2+ Router



### Description


The CT-5363 is an 802.11g (54Mbps) Wireless and Wired ADSL2+ router. Four 10/100 Base-T Ethernet ports, a Wi-Fi Protected Setup (WPS) function, an Ethernet WAN, and an integrated 802.11g WiFi WLAN Access Point (AP) provide with wired LAN connectivity and wireless connectivity separately.

The CT-5363 ADSL2+ router also provides for state of the art security features such as WPA data encryption, Firewall and VPN pass through. The CT-5363 is designed for both residential and business applications that require wireless and wired connectivity to an ADSL broadband network. The CT-5363 supports up to 16 contiguous virtual connections allowing for multiple simultaneous Internet connections. The CT-5363 is also designed with TR-068 compliant color panel and LED indicators, which eases the installation of the modem and makes it more user-friendly.

### Features

- CT-5363 (Annex A)
- UPnP
- Integrated 802.11g AP (Backward compatible with 802.11b)
- WPA/WPA2 and 802.1x
- Optional Turbo mode in wireless (After burner)
- WMM
- RADIUS client
- MAC address filtering
- IP filtering
- Static route/RIP/RIP v2 routing functions
- Dynamic IP assignment
- IP QoS
- NAT/PAT
- Ethernet WAN
- Wi-Fi Protected Setup (WPS)
- IGMP Proxy
- DHCP Server/Relay/Client
- DNS Proxy
- Auto PVC configuration
- Per-VC packet level QoS
- Up to 16 VCs
- Embedded SNMP agent
- Web-based management
- Supports remote administration, automatic firmware upgrade and configuration
- Configuration backup and restoration
- FTP/TFTP server
- Supports TR-069/TR-098/TR-111 for remote management
- TR-068 compliant LED and color connectors

### Applications Diagram

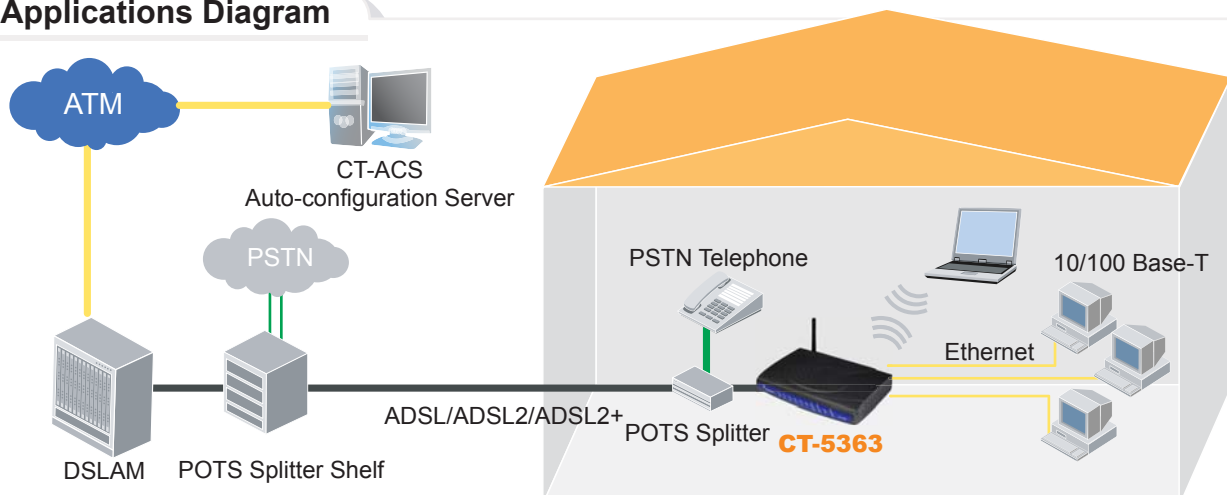

# CT-5363

## Wireless ADSL2+ Router



### Specifications

#### Hardware Interface

RJ-11 X1 for ADSL, RJ-45 X 4 for LAN, RJ-45 X1 for Eth WAN, WPS X 1, Reset button X 1, Power switch X 1, Wi-Fi Antenna X 1

#### WAN Interface

ADSL standard	ITU-T G.992.5, ITU-T G.992.3, ITU-T G.992.1, ANSI T1.413 Issue 2
G.992.5 (ADSL2+)	Downstream : 24 Mbps
G.992.3 (ADSL2)	Downstream : 12 Mbps
G.DMT	Downstream : 8 Mbps
Annex M	Upstream : 1.3 Mbps
	Upstream : 1.3 Mbps
	Upstream : 832 Kbps

#### LAN Interface

Standard	IEEE 802.3, IEEE 802.3u
10/100 BaseT	Auto-sense
MDI/MDX support	Yes

#### WLAN Interface

Standard	IEEE802.11g, backward compatible with 802.11b
Encryption	64, 128-bit Wired Equivalent Privacy (WEP) Data Encryption
Channels	11 Channels (US, Canada)/ 13 Channels (Europe)/ 14 Channels (Japan)
Data Rate	Up to 54Mbps
WPA/WPA2	Yes
IEEE 802.1x	Yes
Afterburner mode (Turbo mode)	Yes (this feature is optional)
WMM	Yes

#### ATM Attributes

RFC 2364 (PPPoA), RFC 2684 (RFC 1483) Bridge/Route; RFC 2516 (PPPoE); RFC 1577 (IPoA), Annex M	
Support PVCs	16
AAL type	AAL5
ATM service class	UBR/CBR/VBR
ATM UNI support	UNI3.1/4.0
OAM F4/F5	Yes

#### Management

SNMP, Telnet, Web-based management, Configuration backup and restoration  
Software upgrade via HTTP, TFTP server, or FTP server  
Supports TR-069/TR-098/TR-111 for Remote Management

#### Bridge Functions

Transparent bridging and learning	IEEE 802.1d
VLAN support	Yes
Spanning Tree Algorithm	Yes
IGMP Proxy	Yes

#### Routing Functions

Static route, RIP, and RIPv2, NAT/PAT, DHCP Server/DHCP Relay/DHCP Client, DNS Proxy, ARP

#### Security Functions

Authentication protocols	PAP, CHAP, TCP/IP/Port filtering rules, Port triggering/Forwarding, Packet and MAC address filtering, Access control, SSH
--------------------------	---

#### QoS

L3 policy-based QoS, IP QoS, ToS

#### Application Passthrough

PPTP, L2TP, IPSec, VoIP, Yahoo messenger, ICQ, RealPlayer, NetMeeting, MSN, X-box, etc

#### Power Supply

External power adapter	100 - 240 Vac
------------------------	---------------

#### Environment Condition

Operating temperature	0 ~ 50 degrees Celsius
Relative humidity	5 ~ 95% (non-condensing)

**Kit Weight (1\*CT-5363, 1\*RJ11 cable, 2\*RJ45 cable, 1\*power adapter, 1\*CD-ROM)**  
1.1 KG

Note: Specifications are subject to change without notice.

Taiwan:  
3F-1, No.10, Lane 609, Chung Hsin Road Section 5, San Chung,  
Taipei, Taiwan 24159  
Tel: 886-2-2999-8261  
Fax: 886-2-2999-8497  
China:  
Room 102, No. 8, LiJing Garden, Yushan Town, Kunshan City,  
Jiangsu Province, China  
Tel: 86-512-57383156, 86-512-57383157, 86-512-57384515  
Fax: 86-512-57383155

UK:  
566 Chiswick High Road Building 3, Chiswick Park Chiswick - London,  
W4 5YA UK  
Tel: 44-0-8453701031  
Fax: 44-0-8453701032  
Spain:  
Edif. América II C/Prócion,7 portal 3 bajo H 28023 Madrid, Spain  
Tel: 34-917990403  
Fax: 34-913510999  
France:  
87, Rue du Gouverneur Général Félix Eboué 92150  
Issy-les-Moulineaux, France  
Tel: 33-1-70715700  
Fax: 33-1-70715701  
Czech Republic:  
TOKOVO Jankovcova 1518/2, 170 00, Prague 7, Czech Republic  
Tel: 420-266-782040  
Fax: 420-266-782990

USA:  
15375 Barranca Parkway, Suite C-104 Irvine, CA 92618, USA  
Tel: 1-949-7539640  
Fax: 1-949-7539020  
Canada:  
300-1275 West 6th Ave. Vancouver, BC V6H 1A6, Canada  
Tel: 1-949-7539640  
Fax: 1-949-7539020  
Brazil:  
Rua Vergueiro, 2087 cj. 101, 04101-000 Sao Paulo, SP - Brazil  
Tel: 55-11-50878831



**COMTREND CORPORATION**

Global contact: sales@comtrend.com  
Website: www.comtrend.com



DS\_CT5363\_R1.0\_051608